



Submittal Data Sheet

1.25 Ton Wall Mount R-32

FTXV15AVJU9

FEATURES

- 12 Year limited Warranty for Parts and Compressor
- Sound pressure as low as 19 dB(A)
- Washable Dry Filter
- Powerful Operation mode
- Auto fan speed control
- Quick warming function

BENEFITS

- Quiet operation
- Low ambient cooling operation down to -4°F (-20°C) with field setting and air adjustment grille
- Operating Range - Cooling (50°F - 114.8°F)
- Operating Range - Heating (-13°F - 64.4°F)
- 12 year limited parts and compressor warranty with online registration
- 5 year limited parts warranty for commercial applications
- Factory Installed Wi-Fi module - Simple App Set up





Submittal Data Sheet
1.25 Ton Wall Mount R-32
FTXV15AVJU9


ELECTRICAL		PIPING	
Power Supply (V/Hz/Ph): *See Engineering Manuals for other voltages.	*208-230 / 60 / 1	Gas Connection: (inch)	1/2
		Liquid Connection: (inch)	1/4
		Drain Connection: (inch)	5/8

SPECIFICATIONS							
COOLING - Airflow Rate (cfm):		COOLING - Sound Level (dBA):		HEATING - Airflow Rate (cfm):		HEATING - Sound Level (dBA):	
High:	540	High:	45	High:	636	High:	45
Med:	470	Med:	41	Med:	537	Med:	41
Low:	381	Low:	36	Low:	452	Low:	37
SuperLow:	339	SuperLow:	33	SuperLow:	388	SuperLow:	33
Dimensions (HxWxD) (in):		11-5/8 x 39 x 10-3/8		Net Weight (lb):		27	


Submittal Data Sheet **1.25 Ton Wall Mount R-32** **FTXV15AVJU9**

DIMENSIONAL DRAWING **FTXV15/18AVJU9**


THE MARK (→) SHOWS PIPING DIRECTION

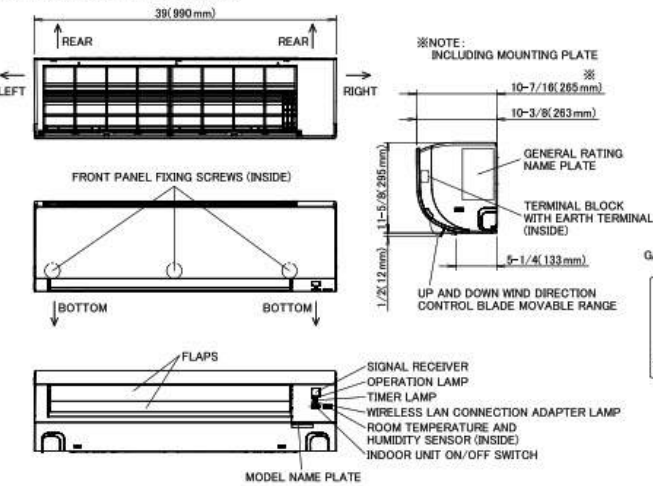


REQUIRED SPACE

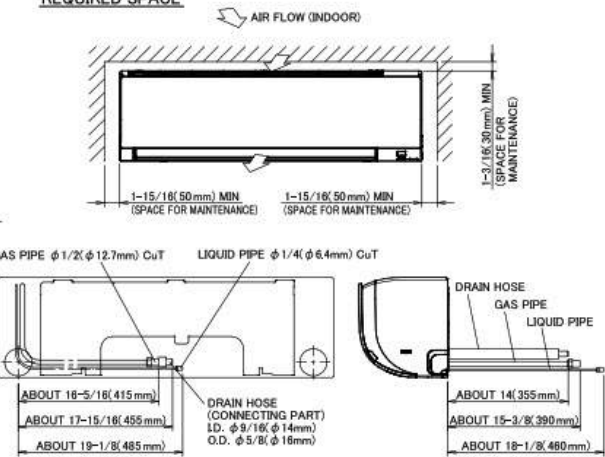


WIRELESS REMOTE CONTROLLER (ARC480A83)



BLADE ANGLE



STANDARD LOCATIONS OF WALL HOLES

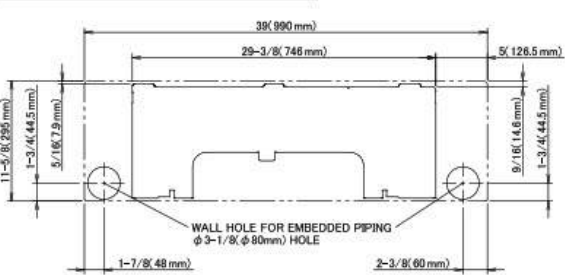

3D150966A